

CYCLO COOL® 1700LF

HIGH PRESSURE LOW FOAMING SEMI-SYNTHETIC



CYCLO COOL®

Description

CYCLO COOL® 1700LF is a high pressure, low foaming, semi-synthetic metal machining fluid designed for moderate to heavy duty applications on ferrous and non-ferrous materials. This non-chlorinated, sulfur-free, and bio-stable product offers synthetic durability along with heavy duty soluble oil lubricity for difficult to machine applications. It works well in hard water regions where a versatile and durable metal machining fluid is a necessity.

Application

CYCLO COOL® 1700LF performs exceptionally well on grinding, boring, reaming, milling, and tapping of ferrous and non-ferrous materials.

Features and Benefits

- > Does Not Contain Chlorine or Sulfur
- > Superior Corrosion Protection
- > Light Oil Residue
- > Easily Recycled and Bio-Stable
- > High Pressure/Low Foaming (1000 psi – 1500 psi)
- > Operator and Machine Friendly
- > Job Shop Versatility
- > Increased Hard Water Stability

CYCLO COOL® 1700LF is a multi-metal, moderate duty metal machining fluid that is an ideal alternative to chlorinated semi-synthetics or high maintenance heavy duty soluble oils.

Mixing

Always add CYCLO COOL® 1700LF to water. For best results use either a CYCLO COOL mixer or continuously stir while adding concentrate to water.


Suggested Operating Dilutions

- > Light Duty 5.0%
- > Moderate Duty 5.0% - 7.0%
- > Heavy Duty 7.0% - 9.0%

Typical Properties

- > Color (Solution): Off White
- > Density: 8.1 lbs./gal
- > pH @ 5%: 8.8 - 8.9
- > Specific Gravity: 1.0

* The above typical properties are subject to manufacturing tolerances.

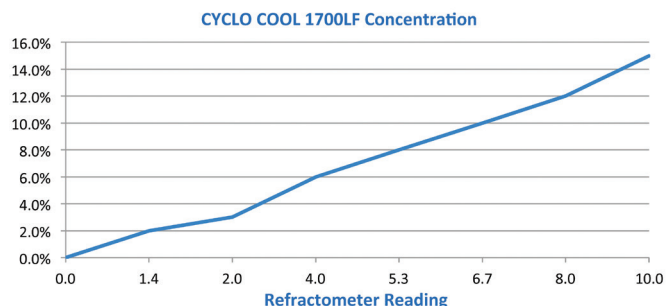

Refractometer Conversion Factor: 1.4

Packaging Options (USA)

- > 5 Gallon Pail
- > 55 Gallon Drum
- > 275 Gallon Tote

Outside the USA

- > 20 Liter Pail
- > 200 Liter Drum
- > 1,000 Liter Tote

Weight per Container

- > 41 lbs
- > 446 lbs
- > 2,228 lbs

The **AUTO-FILL** system is a comprehensive floor cleaning program that eliminates the need for ordering, disposal, and handling of pails, drums, and totes. The AUTO-FILL System combined with industrial strength, environmentally friendly floor cleaning products and eCLEAN monitoring technology provides the customer with total floor care process improvement.

- > Industrial Strength
- > Environmentally Friendly
 - Floor & General Purpose Cleaners
 - EPA Certified “Green” Products
- > On-Site Centralized Refillable Tanks
 - Resilient 125 – 250 Gallon Tank
 - Concentration Proportioned
 - Accurate Durable Proportioner Unit
- > AUTO-FILL System w/ eCLEAN Technology
 - eCLEAN: Remote Usage and Refill Monitoring
 - Inclusive; No Hidden Charges
 - No Shipping Charges
 - No Pallet Charges
 - No Equipment Charges
 - No Container Deposits
- > 50+ National Manufacturing Centers

- > Features and Benefits
 - High Quality 5ME Industrial Cleaners
 - AUTO-FILL System
 - eCLEAN Monitoring Technology
 - Cellular Technology Provides Remote Inventory Control and Reporting Solutions
 - Alternative to Drums, Pails, and Totes



Floor Cleaners	Dilution	Floor Type	Floor Scrubber Compatible	Application	Mix pH
Cyclo Power 5549	1-10%	Painted/ Concrete	Yes	General Purpose (Mop Buckets and Spray Bottles)	8.4
Cyclo Power 1155	1-10%	Painted/ Concrete	Yes	General Purpose (Mop Buckets and Spray Bottles) Aluminum Safe	12.6
Cyclo Power 63000	1-10%	Painted/ Concrete	Yes	General Purpose (Mop Buckets and Spray Bottles) EPA Registered “Green” Fluid	10.3



5ME, LLC
 4270 Ivy Pointe Blvd.
 Suite 100
 Cincinnati, Ohio 45245
 tel: +1 513 719 1600
 fax: +1 513 752 1906

5ME, LLC
 Tech Center
 6990 Murthum
 Warren, MI 48092
 tel: +1 586 473 5070
 fax: +1 586 983 2575

www.5ME.com